




# Terranova<sup>®</sup> Model 762

## Dual Ion Pump Control/Display

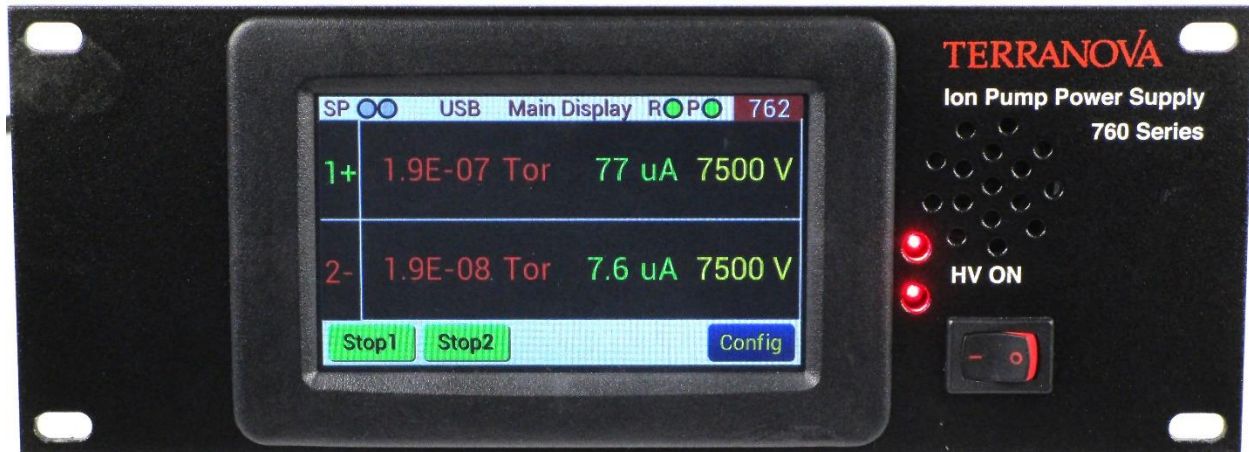

The Terranova Model 762 Ion Pump Control Unit is designed to supply operating power to two sputter ion pumps and to display the voltage, current and pressure independently for each. It is designed to start and operate pumps of 60 l/s and smaller and to operate larger pumps of any size at lower pressures.

The Terranova Model 762 is a programmable, microprocessor controlled unit, which gives it great versatility in operation, display, control and data communication. Major features include:

### DUAL INDEPENDENT SUPPLY/CONTROL

- Programmable High Voltage Output
- Programmable Maximum Current
- Programmable Pump Size for Pressure Display
- Programmable Process Control Set Point
- Choice of Pressure Units
- Display for voltage, current and pressure
- Ethernet, USB, RS 232, 422, 485 Serial I/O for Data Collection and Computer Control
- Analog Outputs for Monitoring Voltage and Current
- Ground Sensing Circuit for Operator Safety

### GENERAL FEATURES

- CE/CB Conformance for EMI, EMC and Safety
- Universal Power Supply: 100-240 VAC, 50/60 Hz

Phone: 800-446-8811/650-969-8811 • FAX: 650-965-0764  
info@duniway.com • www.duniway.com

## Specifications

### INPUT PARAMETERS

Voltage Universal: 100-240 VAC, 50/60 Hz  
Current 2 Amp maximum in START mode (115 VAC).

### OUTPUT PARAMETERS (Each Module)

Open Circuit Voltage Set +/-2000 to 7000 VDC  
(Units shipped with + high voltage polarity unless otherwise specified.)  
Short Circuit Current Operator Set 50 milliamps maximum  
Overload Protection Fuse for line power.  
Power automatically adjusted for pump starting.  
Display LCD Displays:  
4 Digits plus Sign (+/-) XXXX - volts  
3 Digits Current - milliamp and microamp autoranging  
2 Digits plus Exponent for Pressure  
Pressure Units Operator Set: Torr, mBar, Pascal  
Set Point Relay Rated at 240 VAC, 2 Amps

### ANALOG OUTPUTS

Voltage 0 - 10 volts; 1 volt per 1000 volts  
Current 0 - 10 volts; User Selectable  
**Linear Output:** 200 microamps/volt to 2000 microamps  
2 milliamps/volt to 20 milliamps  
20 microamps/volt to 200 microamps  
**Logarithmic Output:** 0 to 50 mA

### CONNECTORS/CABLES

Line Power (1) 6.7 foot (2 meter) length Belden Type 17250 or equivalent NEMA 5-15P grounding plug. PH-290B  
High Voltage Output (2) Fischer or Kings Connector, Rated at 10KV  
Ion Pump Cables: -10 Series, See Duniway Catalog/Website  
Serial I/O 9-Pin D-sub type Connector, Female Pins  
Miscellaneous I/O 15-Pin D-sub type Connector, Female Pins  
Ground Sense (2) Isolated 8/32 Threaded Stud

### DIMENSIONS

Panel 9.5 in (24.1 cm) W x 3.5 in (9 cm) H  
Cabinet Depth 16 in (406 cm) deep  
(Allow 4 in (10.2 cm) extra for cable clearance)

### WEIGHT

Installed Weight 6 lb (2.7 kg)  
Shipping Weight 10 lb (4.5kg)

### OPERATING ENVIRONMENT

Temperature 32°F to 105°F (0°C to 40°C)  
Humidity 0 - 80% Relative Humidity, Non- condensing  
Altitude Sea Level to 10,000 feet (3100 meters)

## **Current Pricing**

Part. No.	Description	Price
T-762-K110	Two 10kV Kings HV connectors (110 VAC)	\$3,800
T-762-K220	Two 10kV Kings HV connectors (220 VAC)	\$3,800
T-762-F110	Two Fischer-style HV connectors (110 VAC)	\$3,800
T-762-F220	Two Fischer-style HV connectors (220 VAC)	\$3,800